


# Tradesman Sandfaced Red Multi



**Ibstock**  
At the heart of building

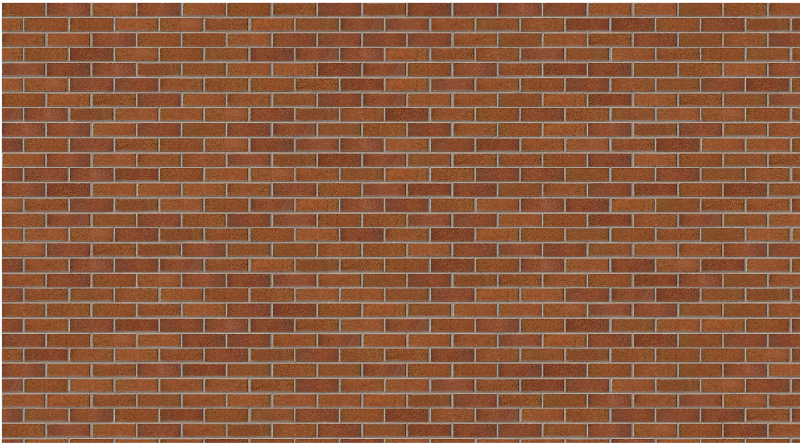

## Product Information

|                        |                  |
|------------------------|------------------|
| Ibstock Code:          | A2980A           |
| Type:                  | Wirecut extruded |
| Facing Description:    | Sandfaced        |
| Dry Brick Weight (kg): | 2.3kg            |
| Pack Quantity:         | 500              |
| Packaging (standard):  | Banded (Plastic) |
| Factory:               | Chesterton       |
| EPD:                   |                  |

## Technical Specification (to BS EN 771-1)

|                                                                     |                       |
|---------------------------------------------------------------------|-----------------------|
| Brick Dimensions (L x W x H mm):                                    | 215x102x65            |
| Size Tolerances Mean & Range:                                       | T2 R1                 |
| Configuration:                                                      | Vertically Perforated |
| Voids (%):                                                          | NPD                   |
| Compressive Strength (N/mm <sup>2</sup> ):                          | 60                    |
| Active Soluble Salts:                                               | S2                    |
| Water Absorption (% weight):                                        | 9                     |
| Durability:                                                         | F2                    |
| Gross Dry Density (Sound Insulation) (Kg/m <sup>3</sup> ):          | 1660                  |
| Equivalent Thermal Conductivity "K" value 5% Exposed:               | 1.16                  |
| Initial Rate of Absorption (Suction Rate) (Kg/m <sup>2</sup> /min): | 0.3                   |
| EAN:                                                                | n/a                   |